## **MENUMASTE** Commercial



Model DEC11E2 shown

## **Heavy Volume** This category of microwave is ideal for...

#### **Applications:**

- Quick service restaurants
- Fast casual dining
- Bars & grills

#### **Defrost:**

- Defrosts most frozen food products

# Heavy Volume

## Menumaster Commercial Microwave Model DEC11E2

#### **Power Output**

- 1100 watts of power.
- 11 power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.
- Unique method of energy distribution provides superior even heating throughout the cavity.
- Interlock switch assembly is engineered for maximum durability and long life.

#### Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option with one-touch programming. Reduces prep time, labor and food waste while providing consistent results.
- Controls are user friendly and require minimal training.
- Multiple quantity pad calculates the proper cook times for multiple portions.
- Ample 17 liter (.6 cubic ft.) capacity accommodates a standard half-sized pan.
- Stackable to save valuable counter space.
- Interior ceramic shelf is sealed and recessed to reduce plate-to-shelf edge impact and keep spills contained.


### **Easy to Maintain**

- Stainless steel exterior and interior for easy cleaning and a professional look.
- Constructed to withstand the foodservice environment.
- Removable, cleanable air filter and clean filter reminder protects oven components.
- ETL Listed.







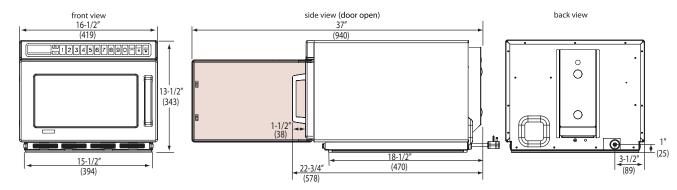

Installation Clearance: 7" (177.79) top and sides

Drawings available from KCL CADlog - techs@kclcad.com

Specifications		
Model	DEC11E2	UPC Code 719881159294
Configuration	Countertop	'
Control System	Touch	
Programmable Control Pad	10	
Settings Programmable	100	
Max. Cooking Time	60:00	
Power Levels	11	
Defrost	Yes, power level 2	
Time Entry Option	Yes	
Microwave Distribution	Double rotating antennas, top and bottom	
Magnetrons	2	
Display	LED	
Stackable	Yes	
Stage Cooking	Yes, 4	
Door Opening	Grab and pull handle	
Signal	Adjustable, end of cycle	
Air Filter	Yes, removable, with clean filter reminder	
Multiple Portion Setting	Yes, up to 2 portions	
Exterior Dimensions	H 343 (13 ½")	W 419 (16 ½") D** 578 (22 ¾
Cavity Dimensions	H 171 (6 ¾")	W 330 (13") D 305 (12")
Door Depth	940 mm (37"), 90°+ door open	
Usable Cavity Space	17 liter (.6 cubic ft. )	
Exterior Finish	Stainless steel	
Interior Finish	Stainless steel with sealed-in ceramic shelf	
Power Consumption	2000 W, 8.7 A	
Power Output*	1100 W* Microwave	
Power Source	230V, 50 Hz, 16 A single phase	
Plug Configuration / Cord	CEE 7/7 "Schul	κο" 1.7m (5′ 6″)
Frequency	2450 MHz	
Product Weight	25 kg (56 lbs.)	
Ship weight (approx.)	28 kg (62 lbs.)	
Shipping Carton Size	L 625 (24 %")	W 556 (21 %") D 473 (18 %")

#### Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items and shall have automatic cooking capability for up to two portions. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlit. There shall be 11 power levels, 4 cooking stages and defrost mode at 20% power or power level 2. Microwave output shall be 1100 watts distributed by two magnetrons each with a rotating antenna to provide superior even heating throughout the cavity. Heavy duty door shall have a tempered glass window and a grab and pull handle with 90°+ opening for easy access. The large 17 liter (6 cubic ft.) cavity shall accommodate a standard 152 mm (6") deep half-sized pan. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Oven shall have removable, cleanable splatter shield. Air filter shall be easily accessible and removable from the front of the oven and have a "clean filter" reminder feature. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, ETL for safety.

#### Warranty

Warranty Certificate for this product can be found by locating it on the ACP, Inc. website at:

www.acpsolutions.com/warranty





Measurements are in millimeters

- \* IEC 60705 Tested
- \*\* Includes handle



Printed in the U.S.A.